


# MileGate TUDA1

The serial interface unit brings powerful functions and high flexibility for TDM data applications on the MileGate platform

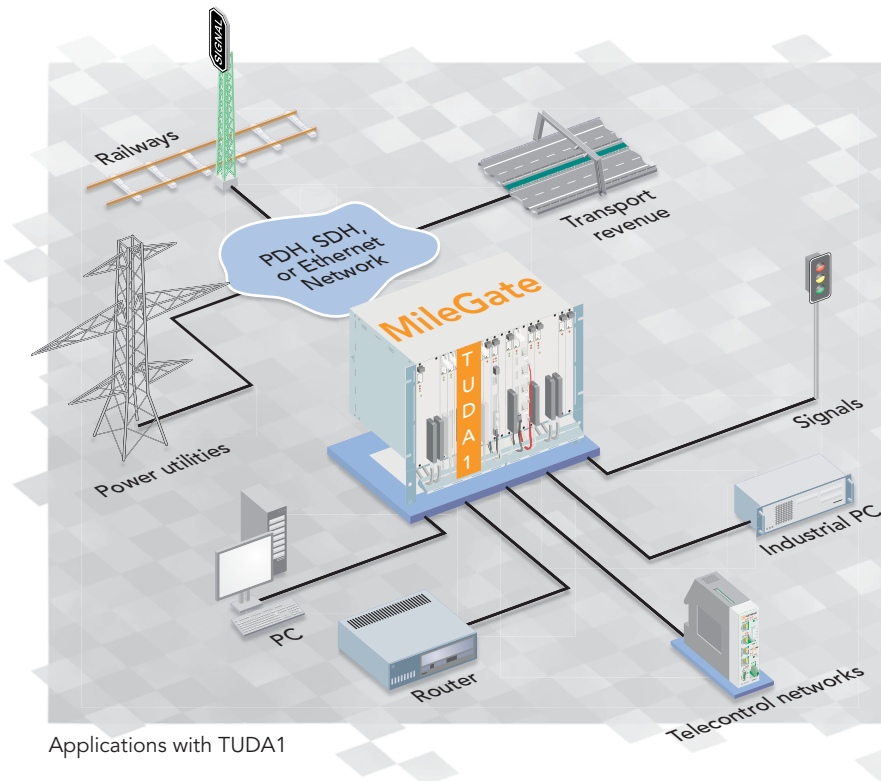

Applications with TUDA1

- 4 independent configurable serial ports on one single unit
- Configurable as V.35, X.24/V.11, V.24/V.28, RS-485,
- Additional Ethernet interface
- Point-to-multipoint and multipoint-to-multipoint connections
- Centralized conferencing
- Section protection (SNCP)
- 1+1 end-to-end path protection
- 1+1 equipment protection
- Shared protection ring
- Performance monitoring
- All functions from one network management system

TUDA1 provides different types of data interfaces on one unit, configurable via the network management system. With it you can connect a wide range of data terminal equipment, with different interface types and data rate requirements to only one unit in one slot. This improves subrack space utilization and optimises your investment.

#### ■ Enhanced data service capabilities in MileGate

This unit addresses the specific needs of data service suppliers.

TUDA1 has access to MileGate's TDM bus, which provides 128 x E1 cross-connect capability. Each TUDA1 port has 2Mbps access to the TDM bus. Low and high speed data interfaces can be configured on TUDA1.

Low speed interfaces intended for connection to controllers, valves or detectors as well as high-speed interfaces for large bandwidth applications, such

as connections to routers or modems, are available. In conjunction with the 2Mbps interface unit LOMI8, TUDA1 can also be used as a data interface to E1 channel converter, allowing up to 52 converters in one single MileGate.

A comprehensive set of protection mechanisms is available in TUDA1, covering end-to-end traffic protection and section protection for point-to-point applications, plus 1+1 equipment protection for redundancy of service units.

The MileGate platform with TUDA1 also offers a shared protection ring mechanism for protection of point-to-multipoint and multipoint-to-multipoint connections in a ring topology.

#### ■ Interface flexibility

TUDA1 provides four serial interface ports that can be individually configured via the networks management system in order to cover several types of applications. Each port can be configured as:

- V.35
- X.24/V.11
- V.24/V.28
- RS-485 (2- and 4-wire mode)

An additional Ethernet interface, configurable as a bridge, is also available on TUDA1.

The access to the TDM bus is non-blocking, all interfaces can be used in parallel.

#### ■ Supplementary features

In addition to the different types of interfaces supported, TUDA1 offers extra features to enhance data services provisioning:

- Section protection (SNCP)
- 1+1 end-to-end path protection
- Point-to-multipoint and multipoint-to-multipoint connections
- Centralised conferencing
- Shared protection ring

- 1+1 equipment protection (core functionality/conferencing)

- Performance monitoring

These attributes add even more advantages for data services deployed from a MileGate network.

#### ■ Built-in transmission solution

TUDA1, in conjunction with MileGate, provides a complete solution for data services. With its wide range of available interfaces, the MileGate can easily be deployed in any type of existing network infrastructure. Data services provided via TUDA1 can be multiplexed and transmitted to the network using the TDM, SDH, and Ethernet (via CEOP1) transport technologies of the MileGate platform.

## Technical Data

<b>Ports</b>	
5 interfaces (connector type)	4 serial (METRAL) + 1 x 10/100BaseT (RJ45)
<b>Serial Interface Types</b>	
Configurable multi-protocol interfaces	V.35, X.24/V.11, V.24/V.28, RS-485 (2-wire and 4-wire mode)
<b>Data Rates Supported</b>	
Sub-rates	0.6 ... 38.4 kbps asynchronous and 0.6 ... 56 kbps synchronous
n x 64 kbps	64 ... 1,984 kbps (n = 1 ... 31) synchronous
Transparent	0 ... 600 kbps with oversampling
<b>Ethernet Features</b>	
Bridging	MAC-to-PPP or MAC-to-HDLC bridging (MAC encapsulation) with learning transport of VLAN tagged frames
<b>Supplementary Features</b>	
Protections	Section protection (SNCP), 1+1 end-to-end path protection, Shared protection ring, 1+1 equipment protection
Connection types	Point-to-point, point-to-multipoint, multipoint-to-multipoint, centralized conferencing
Performance monitoring	According to ITU-T G.826
<b>Management</b>	
MCST	For local management
UNEM	For central management
<b>Power Supply</b>	
Input voltage nominal (min/max)	-48/-60VDC (-40.5VDC ... -72VDC)
<b>Operation Environment</b>	
Temperature range and humidity	According to MileGate environmental specifications



Looking for more information?  
Find your local contact on [www.keymile.com](http://www.keymile.com)  
or contact us: [info@keymile.com](mailto:info@keymile.com) ...